



# No-Clean Desoldering Braid

1814-1825

Desoldering braid (wick) is pre-fluxed copper braid that is used to remove solder, which allows components to be replaced and excess solder to be removed. Techspray wick is available in static dissipative bobbins (except where indicated) for static sensitive environments.



## No-clean flux coated braid -- cleanest in the industry!

Techspray NoClean wick does not leave behind ionic flux residues that can collect and form branches called "dendrites". Other fluxes, if not cleaned properly, can cause dendrites that grow over time (see A, B) and eventually cause short circuits between traces or leads (C). Latent failures lead to costly returns and lower the quality perception of your products.

### Size chart:

Braid #	Color Code	Width (in)	Width (mm)
#1	White	0.035	0.9
#2	Yellow	0.055	1.4
#3	Green	0.075	1.9
#4	Blue	0.098	2.5
#5	Brown	0.130	3.3
#6	Red	0.193	4.9

- No-clean flux coated braid
- Cleanest wick -- clear, non-reactive residues
- Will not leave ionic residue -- avoid dendrite failure
- Exceeds MIL-F-14256, Type
- Anti-static spool (except where indicated)

### Specifications:

- MIL-F-14256
- IPC Standard-J-STD-004



**STE.AL.TECH.**  
Your ideal partner in electronic




STE.AL.TECH. S.R.L. Via 2 Giugno 56, 23807 Merate (LC) - Tel. 039 9910404  
E-mail: [info@weldingtechnology.it](mailto:info@weldingtechnology.it) - Url: <http://www.weldingtechnology.it>



# Pro Wick Desoldering Braid

1801-1813

Desoldering braid (wick) is pre-fluxed copper braid that is used to remove solder, which allows components to be replaced and excess solder to be removed. Techspray wick is available in static dissipative bobbins (except where indicated) for static sensitive environments.

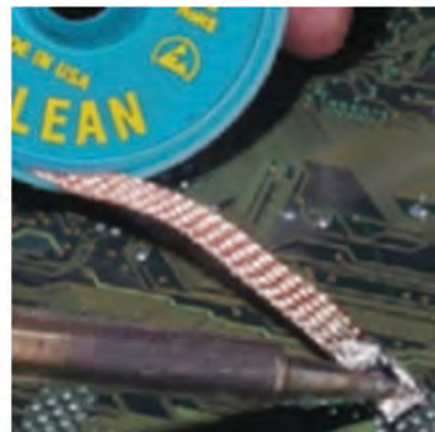

## Rosin coated braid for fast wicking action

For the fastest wicking action, rosin flux coated braid is ideal for high volume PCB production/repair environments.

### Size chart:

Braid #	Color Code	Width (in)	Width (mm)
#1	White	0.035	0.9
#2	Yellow	0.055	1.4
#3	Green	0.075	1.9
#4	Blue	0.098	2.5
#5	Brown	0.130	3.3
#6	Red	0.193	4.9

- Rosin flux coated braid
- Fastest wicking action
- Exceeds MIL-F-14256, Type
- Anti-static spool (except where indicated)

Specifications:

- MIL-F-14256



**STE.AL.TECH.**  
Your ideal partner in electronic



STE.AL.TECH. S.R.L. Via 2 Giugno 56, 23807 Merate (LC) - Tel. 039 9910404  
E-mail: [info@weldingtechnology.it](mailto:info@weldingtechnology.it) - Url: <http://www.weldingtechnology.it>